

DORMA
Door Controls

The Lock Range





DORMA Locks.



Mortice locks for timber doors

6–11

Mortice locks for narrow-stile doors

12–15

Welcome to the safe side.

DORMA locks offer compelling benefits thanks to assured high quality and functional integrity combined with long service lifetimes. With high-grade materials, careful manufacturing and a comprehensive quality management system, these products are able to satisfy virtually all the technical

requirements ever likely to arise.

Conforming to BS EN 12209, BS EN 179 or DIN standards, DORMA locks offer unbeatable performance, safety and security.

Under Approved Document M and BS8300, locks are recommended to have a minimum backset of 55mm

and centres of 72mm (the distance from the lever handle follower to key centre) to ensure ease of operation. Both the Premier and Contract series of locks meet these recommendations. Whichever solution you opt for, you can be sure that absolute reliability and engineering excellence will be included as standard.



CF267

All DORMA 'F' and Mortice Escape Locks are CE marked and CERTIFIRE approved for 1hr on timber doors and 4hrs on metal doors (intumescent pack required for 1hr timber doors – not required for 1/2hr timber fire doors or metal doors).

Mortice locks for timber doors Premier series

	Sashlock	WC sashlock	Latch	Nightlatch	Nightlatch with anti-thrust bolt	Project rollerbolts	Deadlock	
Lock No.	151F	191F	115F	116F	117	484	132F	
Features	BS EN 12209 CE marked	DIN 18251-1, Class 3	DIN 18251-1, Class 3	BS EN 12209 CE marked				
Bolt projection (mm)	Double-throw, 20	Single-throw, 10	Double-throw, 20			Double-throw, 20	Double-throw, 20	
Backset D (mm)	55, 60	55, 60	55, 60	55, 60	55, 60	55, 60	55, 60	
Forend widths (mm)	20	20	20	20	20	20	20	
Latch and bolt position	Central	Central	Central	Central	Central	Central	Central	
Forend designs								
Square ends	●	●	●	●		●	●	
Radiused	●	●	●	●	●		●	
Forend finishes								
Satin-brushed stainless steel	●	●	●	●	●	●	●	
For Europrofile cylinders	●			●	●	●	●	
For bathroom/WC, bolt projection 10 mm		●						
Complete with strike plate and screws	●	●	●	●	●	●	●	
Page	6	6	7	7	7	8	9	

DORMA locks – unique design features combined with manufacturing quality of the highest standard



Contract series		Mortice escape locks			Mortice locks for narrow-stile doors			
Mortice sashlock & W.C. sashlock	Mortice latch & deadlock	9mm Follower lock	Emergency escape lock	Emergency escape lock	Lock with latch and bolt	Lock with roller catch and bolt	Deadlock	Latch
752F/790F	515F/532F	180	181	182	952.0	985.0	917.0	936.0
BS EN 12209 CE marked	BS EN 12209 CE marked	BS EN 12209 CE marked	DIN 18250 CE EN 179	DIN 18250 CE EN 179	DIN 18251-2, Class 3	DIN 18251-2, Class 3	DIN 18251-2, Class 3	DIN 18251-2, Class 3
Double-throw, 20 Single-throw, 10*	Double-throw, 20	Double-throw, 22	Double-throw, 22	Double-throw, 22	Single-throw, 20	Single-throw, 20	Single-throw, 20	
55	55	55	55	55	25, 30, 35, 40, 45	25, 30, 35, 40, 45	25, 30, 35, 40, 45	25, 30, 35,
20	20	20	20	20	24	24	24	24
Central	Central	LH or RH	LH or RH	LH or RH	Central	Central	Central	Central
●	●				●	●	●	●
●	●	●	●	●				
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	
● *								
●	●	●	●	●				
10	10	11	11	11	12	13	14	15

*790F

Features

- Galvanised steel lock case, bronze bushed
- Latch bolt nickel-plated brass
- Nickel plated brass deadbolt with anti-drill steel rollers
- Sashlock bolt projection, double throw, 20mm
- Bathroom/WC lock bolt projection, single throw, 10mm
- 8 mm heavy sprung square follower
- Special bronze-bushed, self-adjusting clamp follower for rattle-free lever handles
- Maintenance-free, pre-lubricated silent-pattern latch
- Through-bolt protection sleeves for holes for standard fixings
- Technical Specification to BS EN 12209, CE marked and CERTIFIRE approved
- Non-handed

Backsets D (mm)

55, 60

Forend widths (mm)

20

Forend designs

- Radiused
- Square ends

Forend finish

- Satin-brushed stainless steel





151F

Mortice Sashlock for Europrofile cylinders
Night Latch Function
Follower-to-Keyway centres 72mm



191F

Mortice Bathroom/WC Lock
8mm turn follower
Follower-to-turn follower centres 78mm

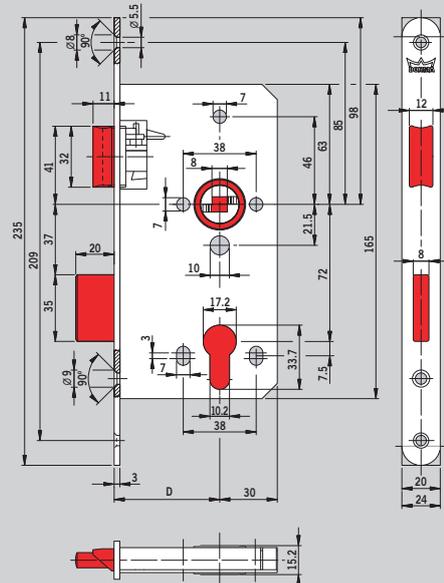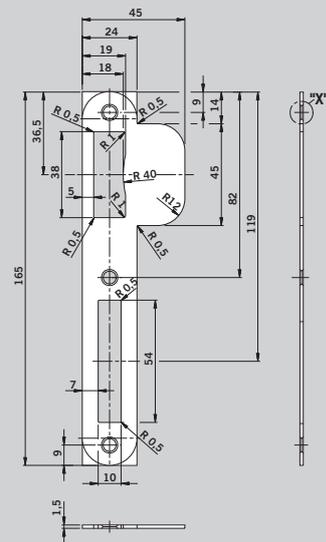

Features

- Galvanised steel case, bronze bushed
- Latch bolt nickel-plated brass
- 8 mm heavy sprung square follower
- Special bronzed-bushed, self-adjusting clamp follower for rattle-free lever handles
- Maintenance-free, pre-lubricated silent-pattern latch
- Through-bolt protection sleeves for holes for standard fixings
- Technical Specification: 115F and 116F to BS EN 12209, CE marked and CERTIFIRE approved, 117 to DIN 18251-1 Class 3
- Non-handed

Backsets D (mm)

55, 60

Forend widths (mm)

20

Forend designs

- Radiused
- Square ends (except 117)

Forend finish

- Satin-brushed stainless steel



115F

Mortice Latch




116F

Mortice Nightlatch for Europrofile cylinders
Follower-to-Keyway centres 72mm



117

Mortice Nightlatch with anti-thrust bolt for Europrofile cylinders
Follower-to-Keyway centres 72mm

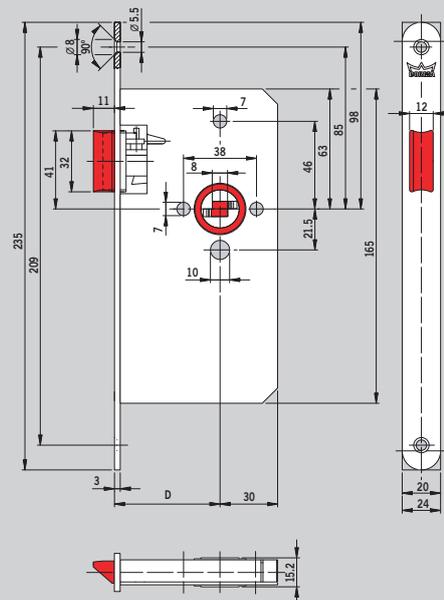

Features

- Galvanised steel lock case
- Roller bolt of brass, adjustable
- Nickel-plated brass deadbolt with anti-drill steel rollers
- Bolt projection, double-throw, 20 mm
- Forend in centre, non-handed
- Technical Specification: DIN 18251-1

Backsets D (mm)

55, 60

Forend widths (mm)

20

Forend design

- Square ends


Forend finishes

- Satin-brushed stainless steel



484

**Mortice Rollerbolt Lock
for Europrofile cylinders**

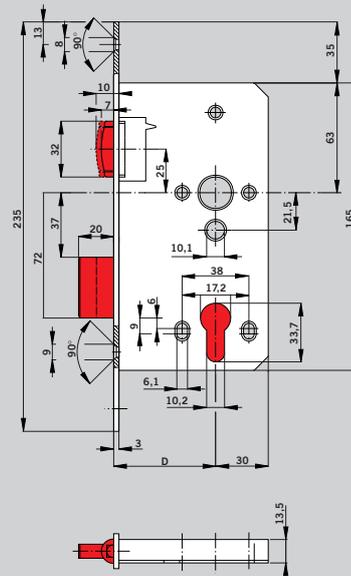

Features

- Galvanised steel lock case
- Latch bolt nickel-plated steel
- Nickel plated steel deadbolt with anti-drill steel rollers
- 752F/532F lock bolt projection, double throw, 20mm
- 790F lock bolt projection, single throw, 10mm
- 8 mm heavy sprung square steel follower in drawn steel bushes
- Maintenance-free, pre-lubricated silent-pattern latch
- Holes for standard fixings
- Technical Specification to BS EN 12209, CE marked and CERTIFIRE approved
- Non-handed

Backset (mm)

55

Forend widths (mm)

20

Forend designs

- Radiused
- Square ends

Forend finish

- Satin-brushed stainless steel



752F

Mortice Sashlock for Europrofile cylinders
Night Latch function
Follower-to-Keyway centres 72mm



790F

Mortice Bathroom/WC Lock
8mm turn operated follower
Follower-to-turn follower centres 78mm





515F

Mortice Latch



532F

Mortice Deadlock for Europrofile cylinders

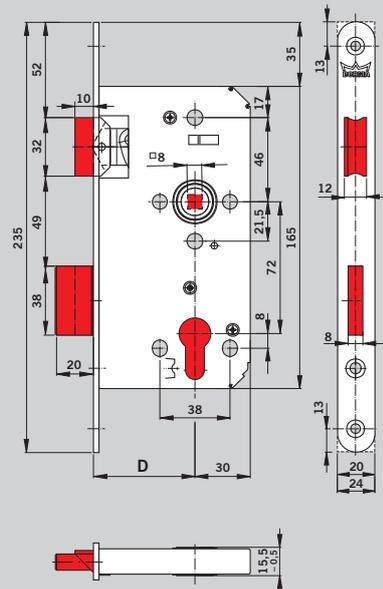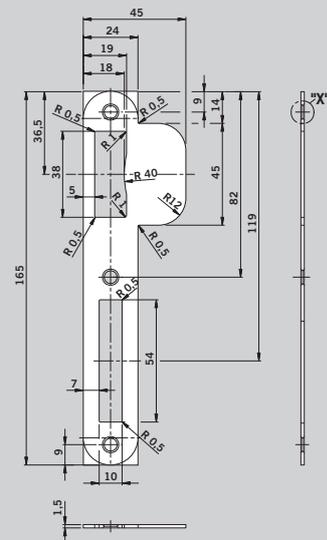

Features

- Lock case, zinc-plated
- Latch and bolt nickel-plated
- Bolt projection, single-throw, 20 mm
- Bolt with anti-saw protection
- 8 mm square follower
- With night latch function
- Technical Specification: DIN 18251-2 Class 3
- Non-handed

Backsets D (mm)

25, 30, 35, 40, 45

Forend width (mm)

24

Forend finish

- Satin-brushed stainless steel

Forend design

- Square ends


Special designs

- Bolt projection 15 mm



952.0

Mortice Sashlock for Europrofile cylinders
Night Latch function
Follower-to-Keyway centres 92mm

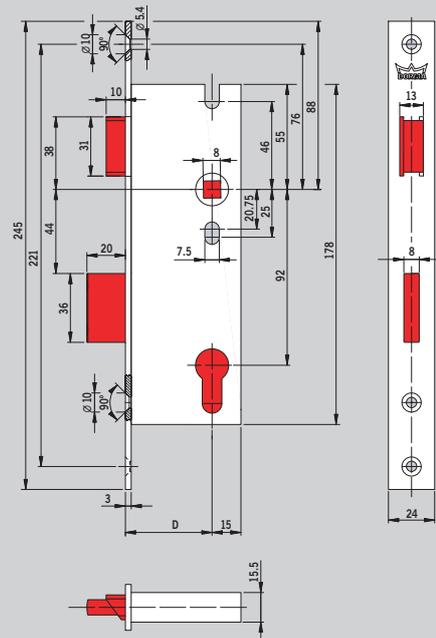

Features

- Lock case zinc-plated
- Adjustable roller catch and bolt, nickel-plated
- Bolt projection, single-throw, 20 mm
- Bolt with anti-saw protection
- Technical Specification: DIN 18251-2
- Non-handed

Backsets D (mm)

25, 30, 35, 40, 45

Forend width (mm)

24

Forend finish

- Satin-brushed stainless steel


Forend design

- Square ends



985.0

Mortice Rollerbolt Lock for Europrofile cylinders

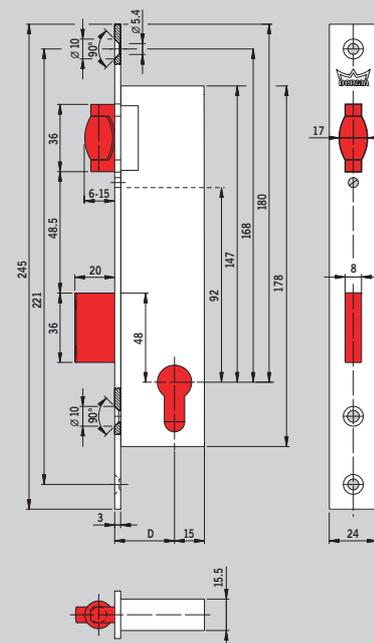

Features

- Lock case zinc-plated
- Bolt nickel-plated with anti-saw protection
- Bolt projection, single-throw, 20 mm
- Technical Specification: DIN 18251-2
- Non-handed

Backsets D (mm)

25, 30, 35, 40, 45

Forend width (mm)

24

Forend finish

- Satin-brushed stainless steel


Forend design

- Square ends



917.0

Mortice Deadlock for Europrofile cylinders

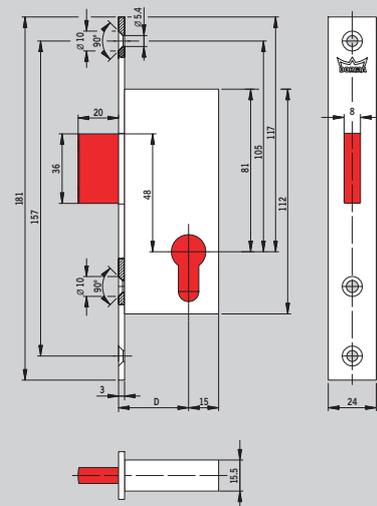



Door Controls



Automatics



**Glass
Fittings and
Accessories**



**Movable
Walls**



Service

DORMA UK Limited
Door Controls Division
Wilbury Way
Hitchin
Hertfordshire
SG4 0AB

Tel: 01462 477600
Fax: 01462 477601
E-mail: hardware@dorma-uk.co.uk
www.dorma-uk.co.uk

DORMA Ireland Limited
PO Box 1050
Maynooth
Co. Kildare

Tel: 01 295 8280
Fax: 01 295 8284
E-mail: dormadublin@dorma.ie
www.dorma.ie