

Since 1966



超薄型軸流扇系列 TA SERIES AXIAL

強勁 POWERFUL
輕巧 DEXTEROUS



MODEL NO: TA-10
TA-12
TA-14

TA系列軸流扇 TA SERIES AXIAL FLOW FAN

本機適用於：

冷氣、冷凍庫之盤管（熱排）散熱、
電機控制箱排氣散熱，外型尺寸輕、
薄、精巧。

Usages:

Heat dissipation for coils on the air conditioner and refrigerator (Frozen Cabinet), ventilation for electrical control boxes. The size for outward appearance is light, thin, fine & artful

葉片及外殼採用ABC+FRP混合料。
強韌可靠，使用時週圍溫度可耐至
65°C。






The blade and exterior casing are made of ABS+FRP mixture Due to it is durable, thus the working temperature can withstand up to 65°C while usage

特性表 SPECIFICATION

項目 機型	電壓 Voltage V	頻率 Frequency HZ	相數 Phase ϕ	極數 Poles P	轉數 Speed RPM	入力 Input W	電流 Current A	風量 Air Flow m ³ /min	靜壓 Static Pressure mmAq	噪音 Noise dB(A)
TA-10	115	60	1	4	1630	30	0.30	10.3	5.0	59.0
		50			1380	32	0.18	8.5	4.0	56.0
		60			1630	32	0.16	10.3	5.0	59.0
TA-12	115	60	1	4	1630	50	0.52	14.2	5.5	61.0
		50			1380	54	0.30	12.0	4.2	57.0
		60			1630	53	0.27	14.2	5.5	61.0
TA-14	115	60	1	4	1580	52	0.52	24.0	6.2	66.0
		50			1380	45	0.25	21.0	4.6	63.0
		60			1580	55	0.28	24.0	6.2	66.0
TA-12	230	50	1	4	1350	30	0.15	11.5	3.7	56.5
		60			1550	35	0.17	13.3	5.0	60.5
TA-14	230	50	1	4	1380	45	0.25	21.0	4.6	63.0
		60			1580	55	0.28	24.0	6.2	66.0

尺寸 DIAMENSION

MODEL 型號	A	B	C	D	E	F	G	H	I	ϕJ	K
TA-10	270	234	234	355	40	88	144	248	330	$\phi 288$	$\phi 7.5 \times 16L$
TA-12	306	156	340	365	37	95				$\phi 325$	$\phi 7.5 \times 16L$
TA-14	355	180	385	410	37	95				$\phi 377$	$\phi 7.5 \times 16L$

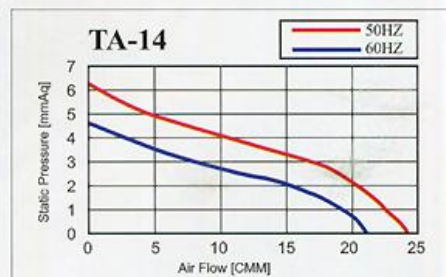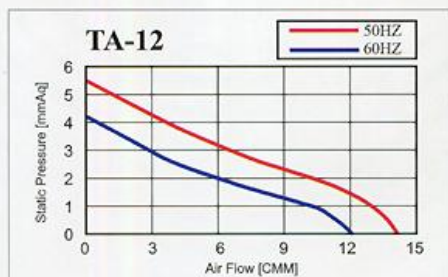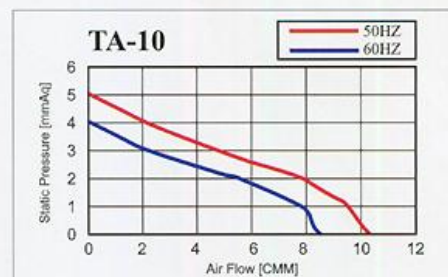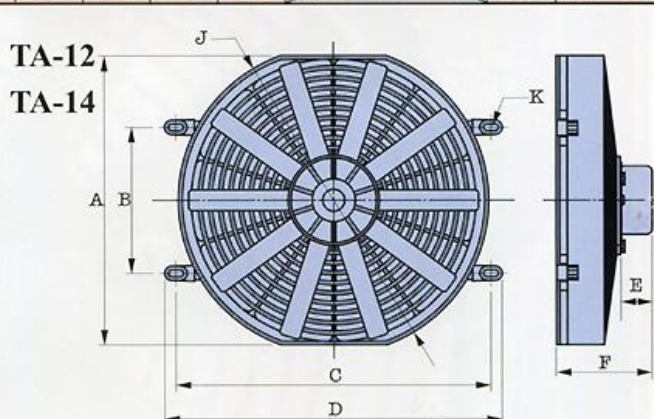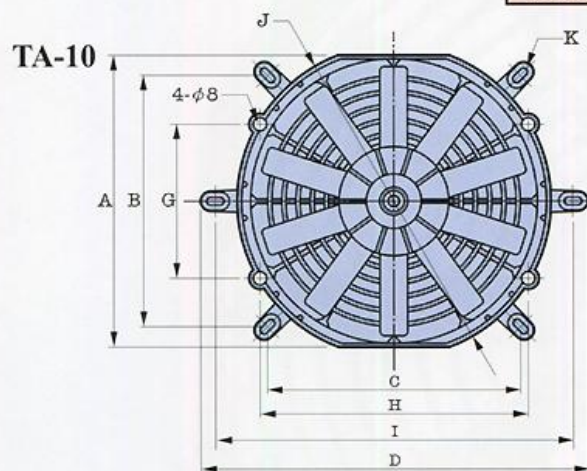

本公司產品若有規格修改或變更恕不另行通知。

Specifications and other descriptions in this catalog are subject to change without notice.



中一五金股份有限公司
<http://www.jouning-blower.com>

台北公司：台北市重慶北路二段136號
TEL. (02) 2550-5338 FAX: (02) 2550-1352
E-mail: jouning.blower@msa.hinet.net

土城工廠：新北市土城區大同街21號
TEL. (02) 2268-2527 FAX: (02) 2268-7272
E-mail: tumbo@ms48.hinet.net

中翼機電股份有限公司
TEL. (03) 453-2919 FAX: (03) 453-3130

國 外 部 門
TEL. (02) 2268-3215 FAX: (02) 2268-3219

東禾祥開發股份有限公司
台北市重慶北路二段136號
TEL. (02) 2550-5338 FAX: (02) 2550-1352